Designs for this project can be printed with either the Stamp Kit for Cloth or screen printing using RISO ScreenMaster.

HOW TOMAKE WINDOW & CAFE CURTAINS

Equipment

- PRINT GOCCO PG-5, PG-11, B6 with PRINT GOCCO Hand Stamper Unit (S-112 or S-113) or PG Screen Printing Kit
- Stamp Inks for Cloth in desired colours
- 1 x B6 Print Master (S-489)
- 2 x Print Lamps (S-105)

Materials

Window Curtain -

- 90cm wide white cotton or curtain material to length Cafe Curtain -
- 44cm wide white cotton or curtain material to length

Method

Window Curtains (right) - Step 1

Print your design onto the material in the lower end as illustrated.


Step 2


Fold both sides of the 90cm wide material 1.5cm and stitch to complete edges.

Step 3

Machine stitch button holes at 14cm intervals, beginning 3cm in from side.

Style of curtain ring may vary placement of button hole height.

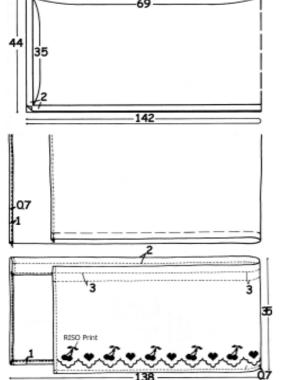

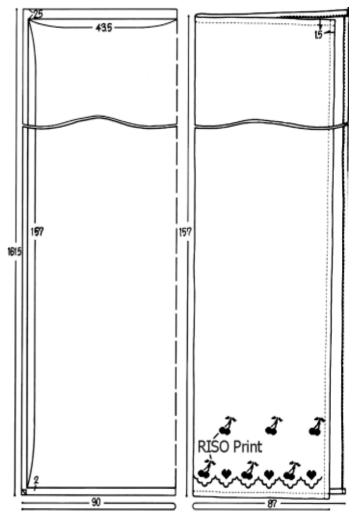

Cafe Curtains (left) - Step 1

Print your design onto the material in the lower end as illustrated.

Step 2

Triple fold both edges and machine stitch.

Step 3

Machine stitch button holes at 15cm intervals, beginning 1.5cm in from side. Style of curtain ring may vary placement of button hole height.

When using curtain rods -

Instead of machine stitching button holes you can leave the top edges open for a curtain rod to be inserted along the top fold.

Remember you may need to adjust the pattern to match the thickness of the rod, so measure first.

Correspondence: PO Box 175, NARRABEEN NSW 2101 Phone: (02) 9979-9700 Internet: www.nehoc.com.au E-mail: support@nehoc.com.au